PUSHUP DOUBLE SECTION LADDER



audinnov®

SAFETY FIRST

Product Details

- > High-visibility orange coloured composite profiles
- > Heavy-duty and solid construction with closed rectangular profiles

Rungs and stiles are replaceable thanks to a unique and patented screw assembly system

Non-slip rubber ladder feet

D-shaped aluminium rungs spaced at 250 mm, "ULTRA-GRIP" technology deeply serrated

> Wall wheels facilitate ladder push up and protect the fibreglass stiles (fitted as a standard feature for all the Helios range of ladders)





Various optional accessories available :

- Clam cleats kit for securing the ladder before climbing
- Rubber cushioned V-shaped pole grip
- > Automatic ladder stabiliser/leveller for working on uneven surfaces


HELIOS

NON-CONDUCTIVE PUSHUP EXTENSION LADDER FOR LOW VOLTAGE LIVE WORKING

EN 50-528 COMPLIANT

LOW- VOLTAGE LIVE WORKING <1000V A.C/1500 V D.C



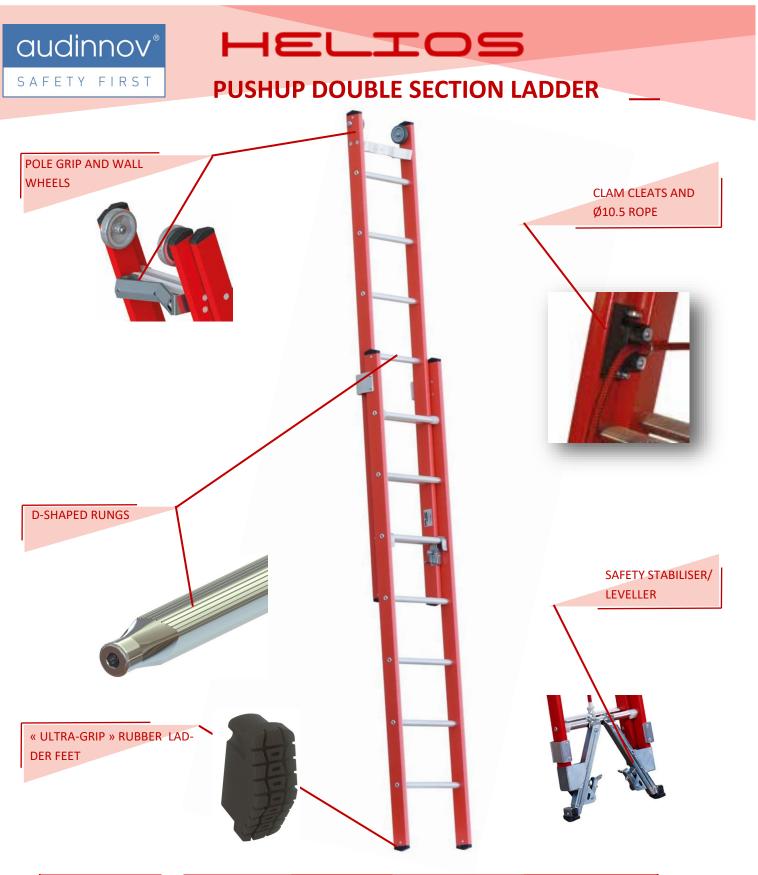

Product code	Lgth close	d Lgth extended	Weight	No of rungs	
		PUSHUP DOUBLE SECTION EXTENSION LADDER			
101120	2 m	3.25 m	12 kg	2 x 7	
101121	2.5 m	4 m	15 kg	2 x 9	
101122	3 m	5 m	17 kg	2 x 11	